
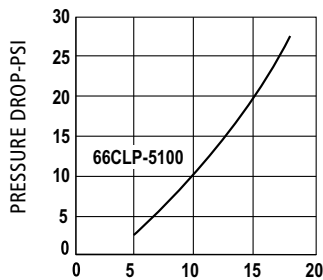


OPW 66CLP Balance Phase II Enhanced Vapor Recovery Reconnectable Breakaway


For more than a decade, the 66CLP has earned the reputation as the industry standard in preventing fuel vapors from escaping during a separation incident on balance systems. Its proven design minimizes downtime and allows all hose points to be put back in service as quickly and easily as possible after a separation event. The OPW 66CLP is also approved for VST Phase II Enhanced Vapor Recovery Systems.

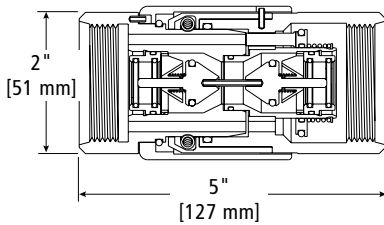

FLOW RATE-GPM (STODDARD SOLVENT)

OPW 66CSU Balance Stage II Vapor Recovery Breakaway

Single-use, non-vapor poppeted balance breakaway. Designed for those who desire single-use breakaway protection on balance systems.



Listings and Certifications

CARB
California Air Resources Board



Materials

Body: Die-cast zinc
Protective Sleeves: Impact modified nylon
Main Seals: Viton®
Main Spring: Stainless steel
Guide and Poppets: Acetal
Weight: 0.97 lbs., 0.44 kg



California Air Resources Board Certified – Executive Order VR-203-N & VR-204-N

66CLP-5100

Features

- ◆ UL listed for use in gasoline, diesel and up to 10% ethanol blends. Specific listings available at www.opwglobal.com.
- ◆ Separates at 350 pounds of axial force.
- ◆ Push-back reconnect style.
- ◆ Durable, lightweight construction.
- ◆ Minimal pressure drop.

Design working pressure

- ◆ 50 psi (3.45 bar) maximum pressure.

Ordering Specifications

Product #	Description
66CLP-5100	Vapor Poppeted Reconnectable Balance Breakaway
66CLP Instruction Sheet Order Number: F-70	

Replacement Parts

Product #	Description
204870	O-ring
204872	Spring
204811	Outer Cover

Listings and Certifications

CARB Certification Numbers	Executive Order VR-203-N (for Balance Phase II Enhanced Vapor Recovery (EVR) Systems Not Including In-Station Diagnostics (ISD))
	Executive Order VR-204-N (for Balance Phase II Enhanced Vapor Recovery (EVR) Systems Including In-Station Diagnostics (ISD) Systems)

Materials

Body: Aluminum
Seals: Buna-N and Viton®
Weight: 1.06 lbs., 0.48 kg



66CSU-5200

Features

- ◆ UL listed for use in gasoline, diesel and up to 10% ethanol blends. Specific listings available at www.opwglobal.com
- ◆ Disposable, shear pin design.
- ◆ Separates at 300 pounds of axial force.
- ◆ Durable, lightweight construction.
- ◆ Minimal pressure drop.

Design working pressure

- ◆ 50 psi (3.45 bar) maximum pressure.

Ordering Specifications

Product #	Description
66CSU-5200	Single use balance breakaway
66CSU Instruction Sheet Order Number: F-72	

