

FibreTite multiport kit includes watertight platform for (2) 5-gallon spill buckets, 40" diameter multiport cover, port covers, frame and skirt.


For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.



634TT-7085-EVR  
FILL CAP, GRAY

61SALP-1020-EVR FILL  
SWIVEL ADAPTOR, BRASS

H12807M FILL  
NIPPLE, 12" LENGTH

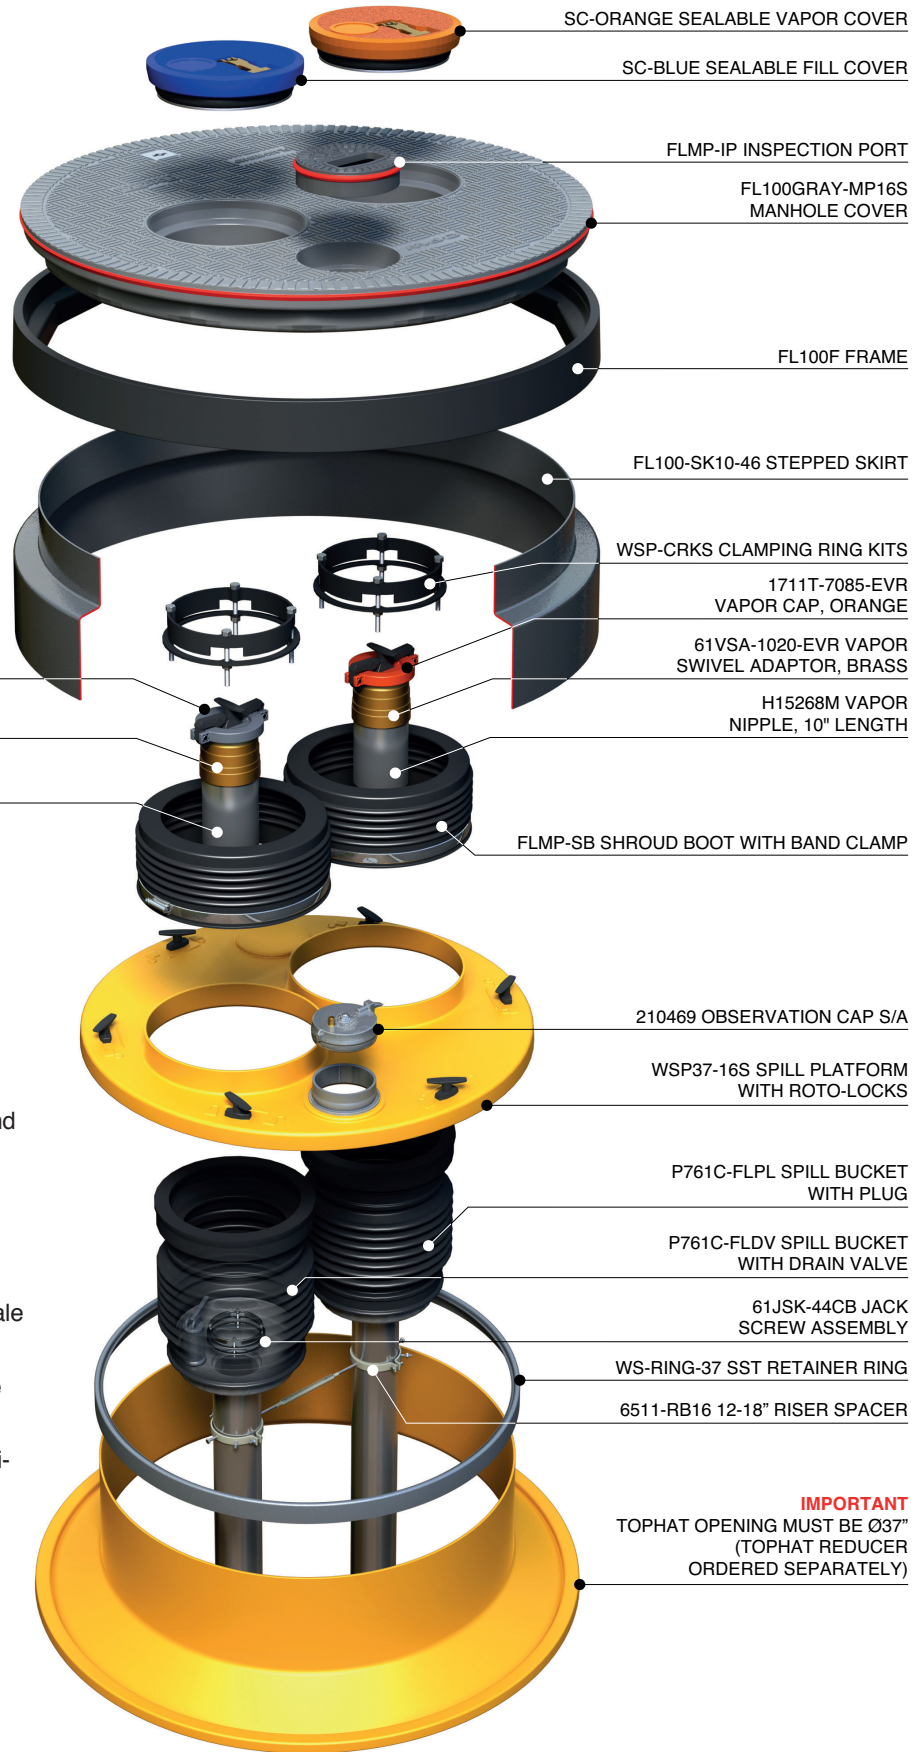

SC-ORANGE SEALABLE VAPOR COVER

SC-BLUE SEALABLE FILL COVER

FLMP-IP INSPECTION PORT

FL100GRAY-MP16S  
MANHOLE COVER

FL100F FRAME

FL100-SK10-46 STEPPED SKIRT

WSP-CRKS CLAMPING RING KITS

1711T-7085-EVR  
VAPOR CAP, ORANGE

61VSA-1020-EVR VAPOR  
SWIVEL ADAPTOR, BRASS

H15268M VAPOR  
NIPPLE, 10" LENGTH

FLMP-SB SHROUD BOOT WITH BAND CLAMP

210469 OBSERVATION CAP S/A

WSP37-16S SPILL PLATFORM  
WITH ROTO-LOCKS

P761C-FLPL SPILL BUCKET  
WITH PLUG

P761C-FLDV SPILL BUCKET  
WITH DRAIN VALVE

61JSK-44CB JACK  
SCREW ASSEMBLY

WS-RING-37 SST RETAINER RING

6511-RB16 12-18" RISER SPACER

**IMPORTANT**  
TOPHAT OPENING MUST BE Ø37"  
(TOPHAT REDUCER  
ORDERED SEPARATELY)



## Features

- Phase I EVR – CARB Approved
- Unaffected by biofuels
- Will not corrode, crack or crumble
- Sealed manhole covers are water and vapor tight
- Easy and safe manual removal
- Lifting aid eliminates back injury and crushed fingers
- Eliminates risk of theft due to no resale value to the scrap market
- Incredibly strong monolithic structure that will not delaminate
- Treads incorporate a specialised anti-slip material
- Range of UV stable colors available that will not flake or crack
- Security locks available
- Cover marking / customisation available
- Anti-static

FibreLite multiport kit includes watertight platform for (2) 5-gallon spill buckets, 40" diameter multiport cover, port covers, frame and skirt.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

**FIBRELITE**   
PART OF OPW A DOVER COMPANY

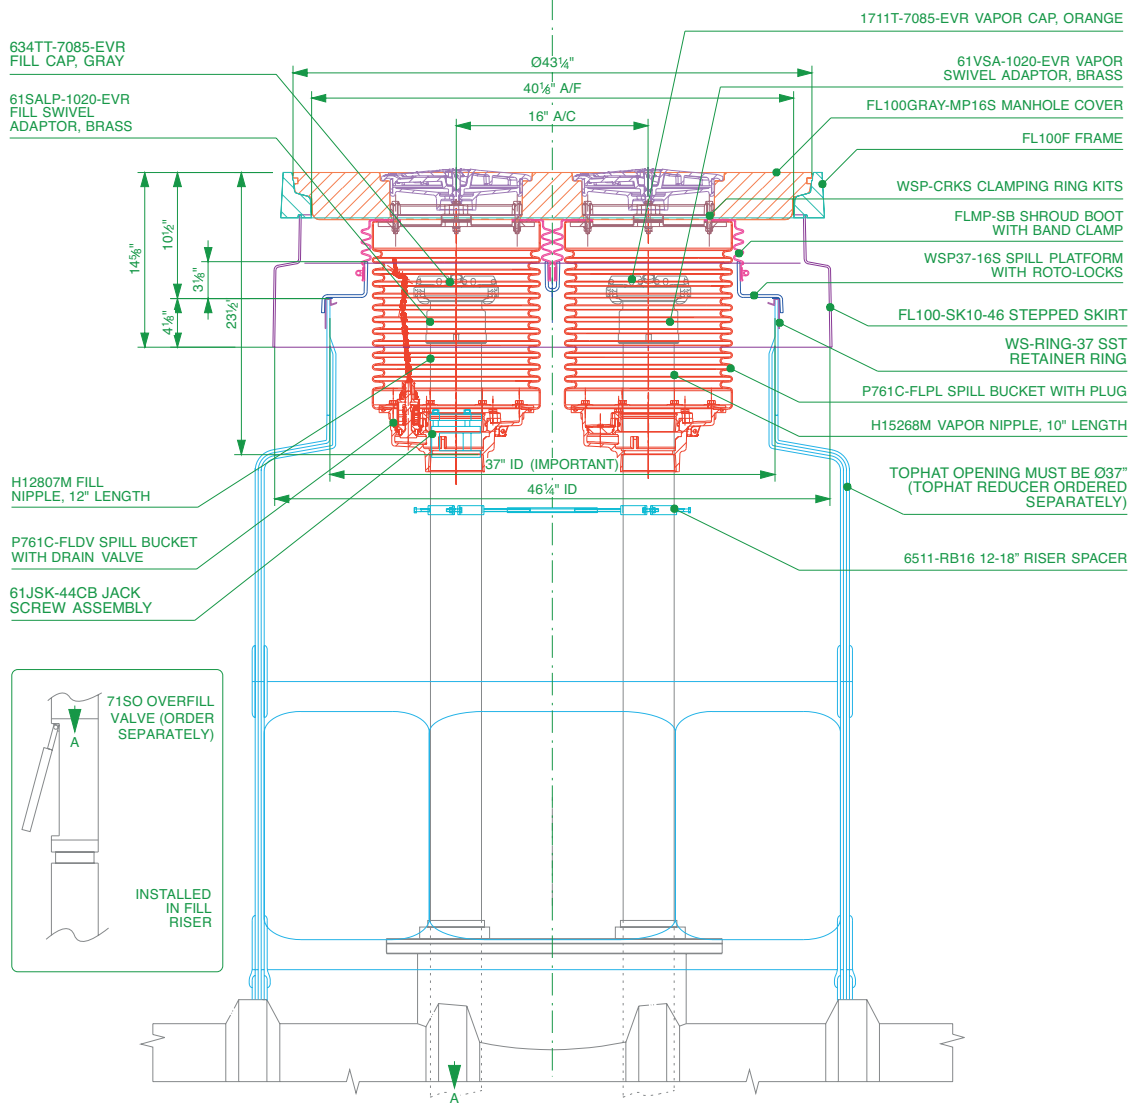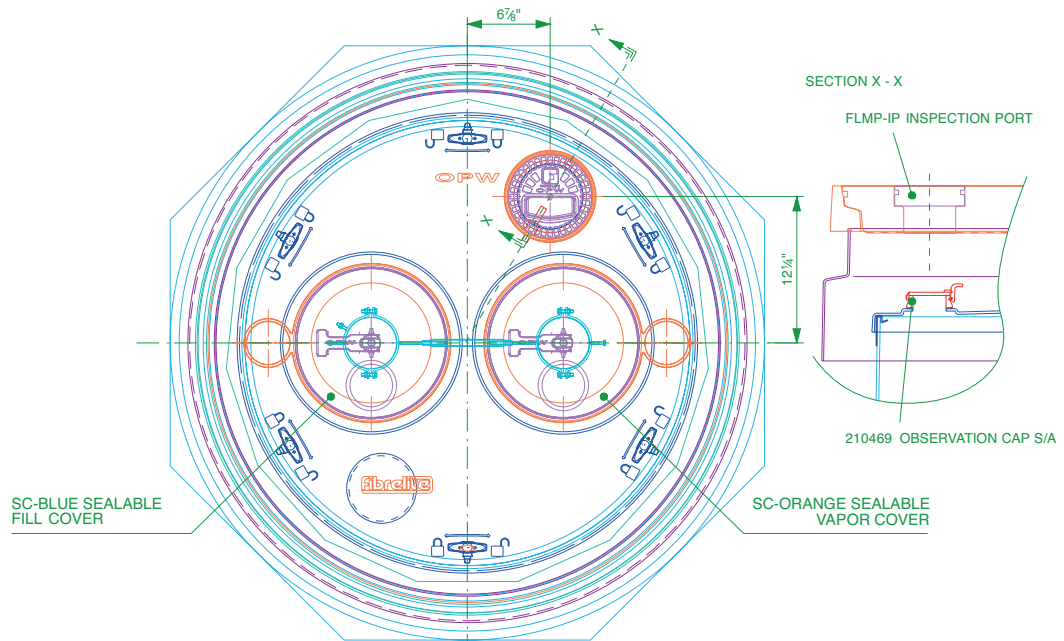

FibreTite multiport kit includes watertight platform for (2) 5-gallon spill buckets, 40" diameter multiport cover, port covers, frame and skirt.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

**FIBRELITE** 

PART OF OPW A DOVER COMPANY

## TYPICAL INSTALLATION

**VERY IMPORTANT**


To allow for drainage, Fibrelite recommends that the concrete be sloped away from the top outer edge of the frame (A) a minimum of 1/2" over a 12" distance. Do not expose the top outer edge of the frame (A) – the concrete pad must be flush with the top outer edge of the frame.

### CONCRETE

**VERY IMPORTANT**

FRAMES MUST BE INSTALLED FLUSH WITH FINISHED GRADE OR SET SLIGHTLY BELOW FINISHED GRADE TO PROTECT FROM SNOWPLOW DAMAGE

**VERY IMPORTANT**  
The underside of the frame must be adequately supported by concrete.

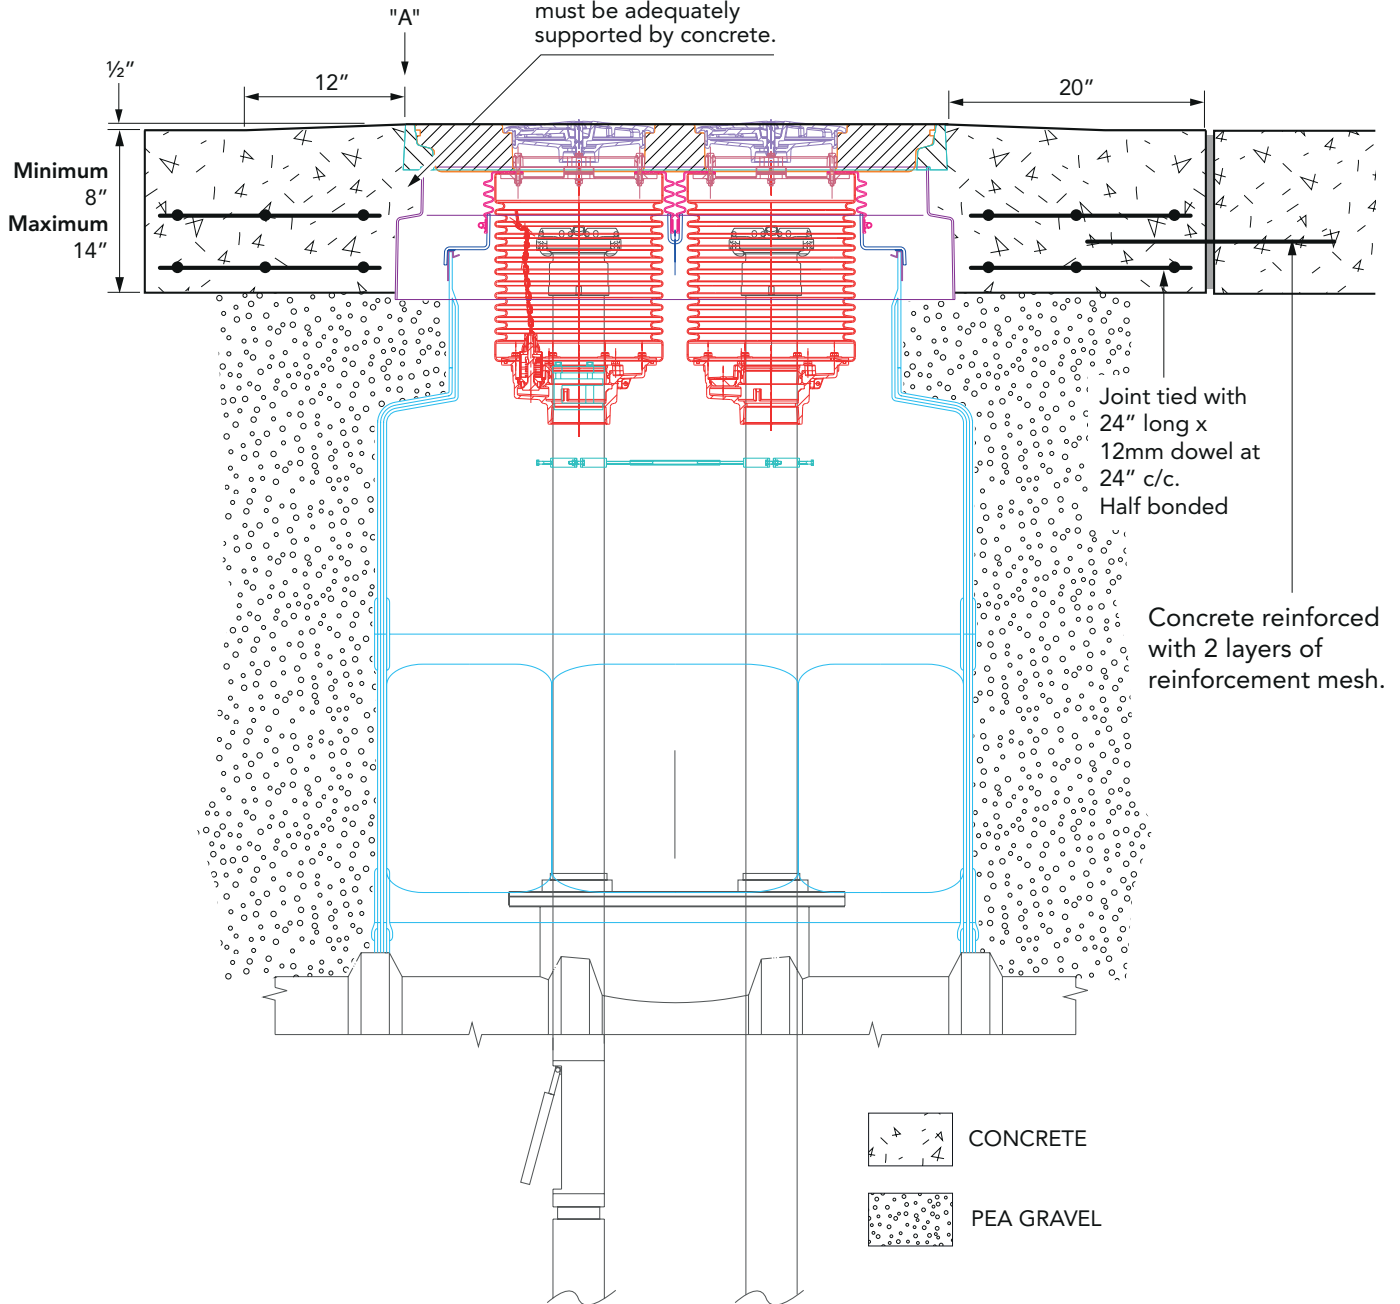

FibreTite multiport kit includes watertight platform for (2) 5-gallon spill buckets, 40" diameter multiport cover, port covers, frame and skirt.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

**FIBRELITE**

PART OF OPW A DOWHER COMPANY