



FibreTite multiport kit includes watertight platform for (2) 5-gallon spill buckets, 40" diameter multiport cover, port covers, frame and skirt.


For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.



634TT-7085-EVR
FILL CAP, GRAY

61SALP-1020-EVR FILL
SWIVEL ADAPTOR, BRASS

H12807M FILL
NIPPLE, 12" LENGTH

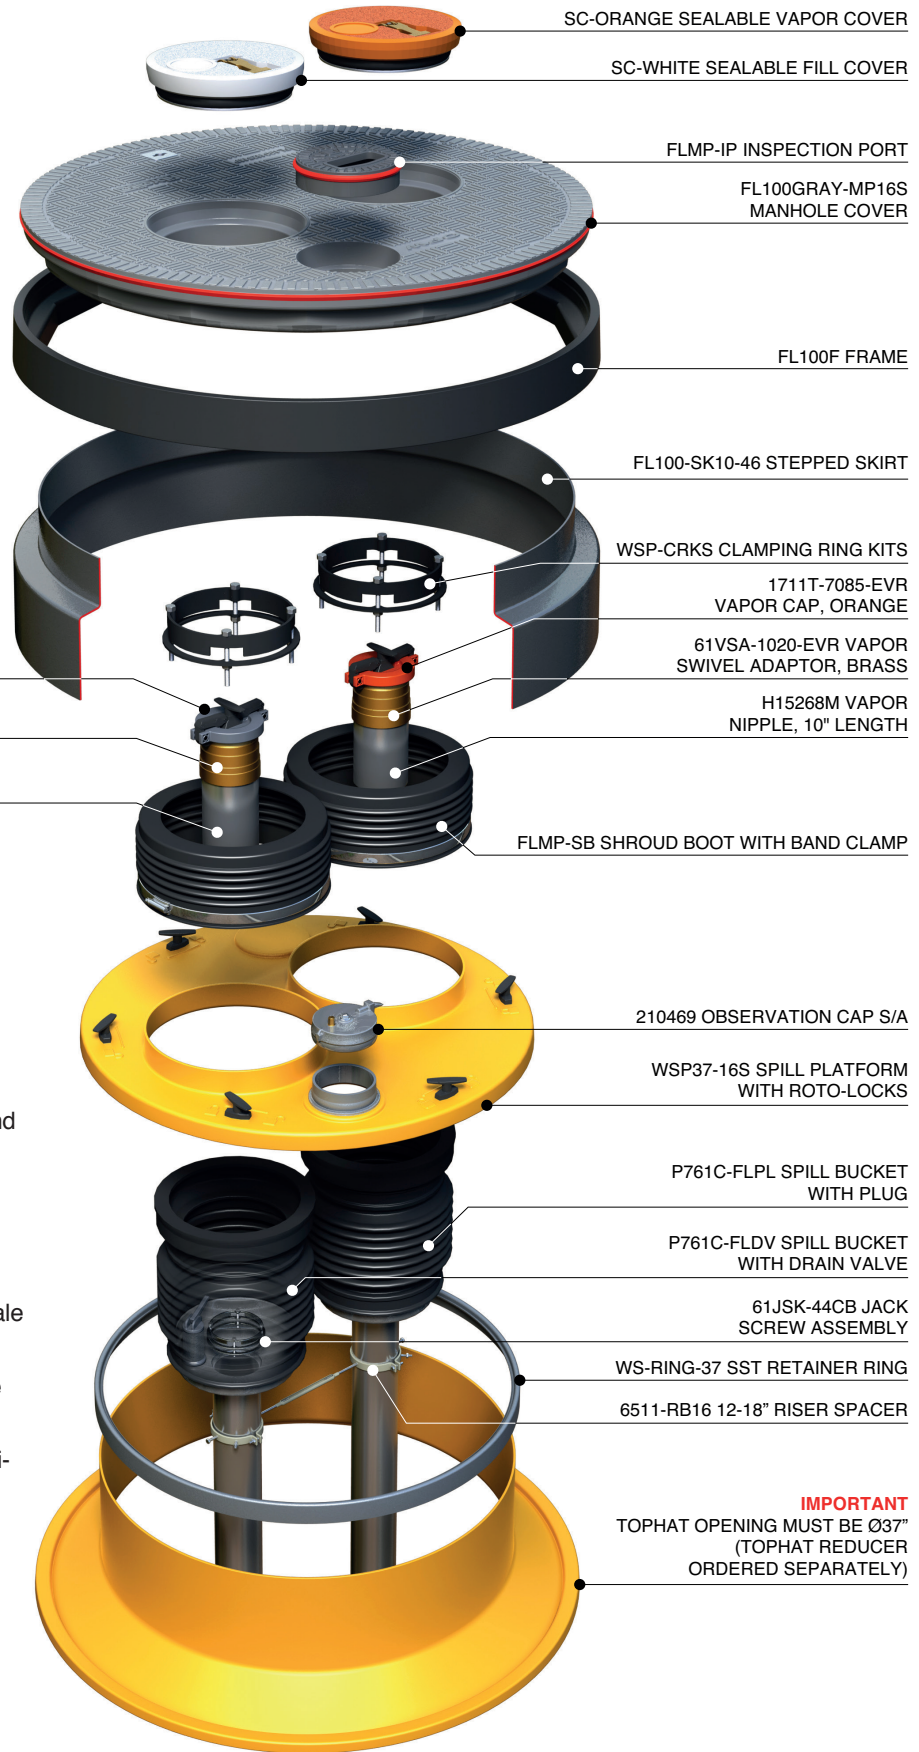

IMPORTANT
TOPHAT OPENING MUST BE Ø37"
(TOPHAT REDUCER
ORDERED SEPARATELY)



Features

- Phase I EVR – CARB Approved
- Unaffected by biofuels
- Will not corrode, crack or crumble
- Sealed manhole covers are water and vapor tight
- Easy and safe manual removal
- Lifting aid eliminates back injury and crushed fingers
- Eliminates risk of theft due to no resale value to the scrap market
- Incredibly strong monolithic structure that will not delaminate
- Treads incorporate a specialised anti-slip material
- Range of UV stable colors available that will not flake or crack
- Security locks available
- Cover marking / customisation available
- Anti-static

FibreLite multiport kit includes watertight platform for (2) 5-gallon spill buckets, 40" diameter multiport cover, port covers, frame and skirt.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

FIBRELITE 
PART OF OPW A DOVER COMPANY

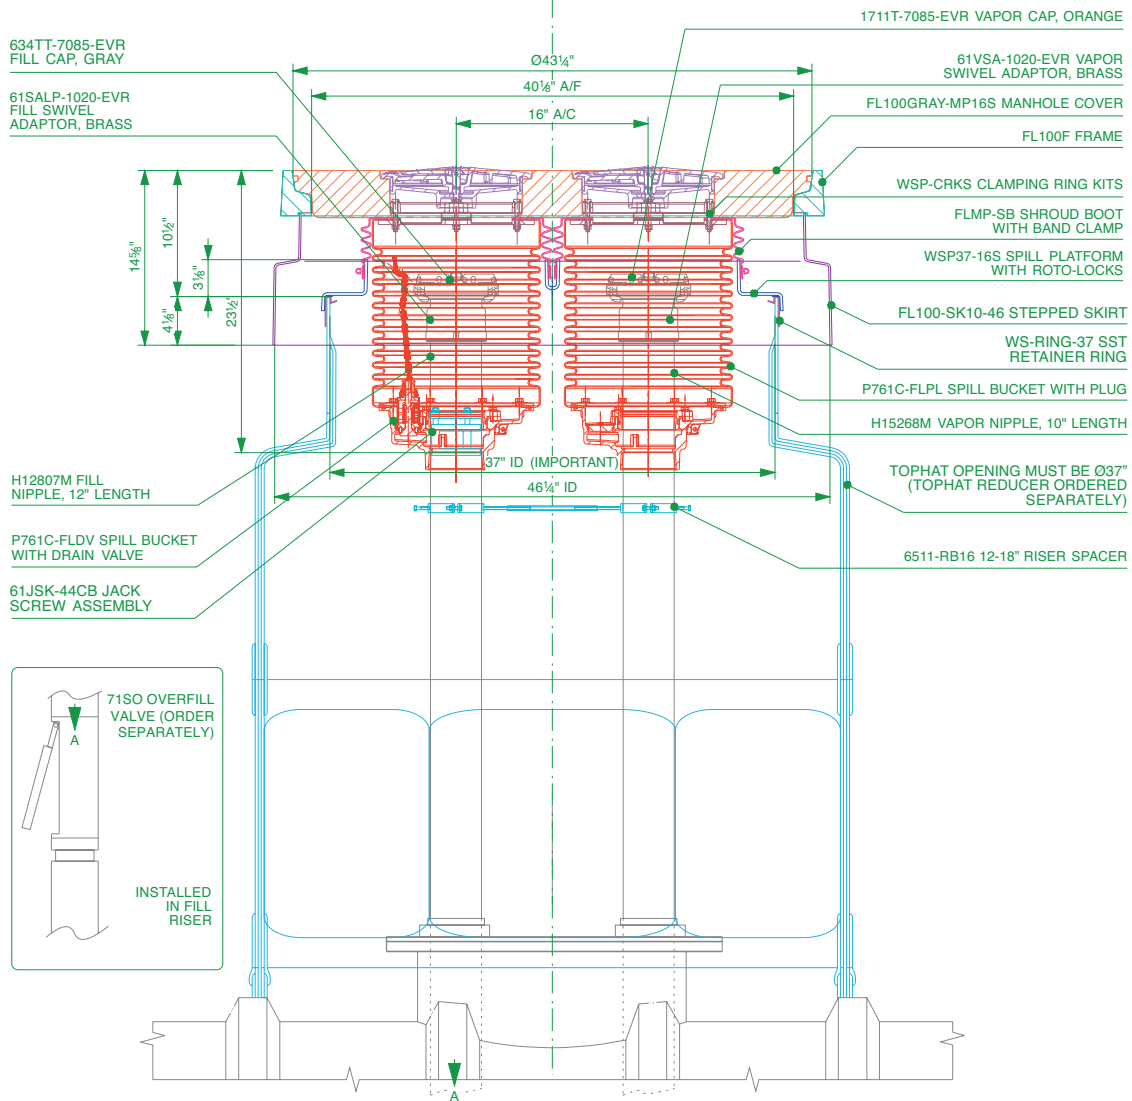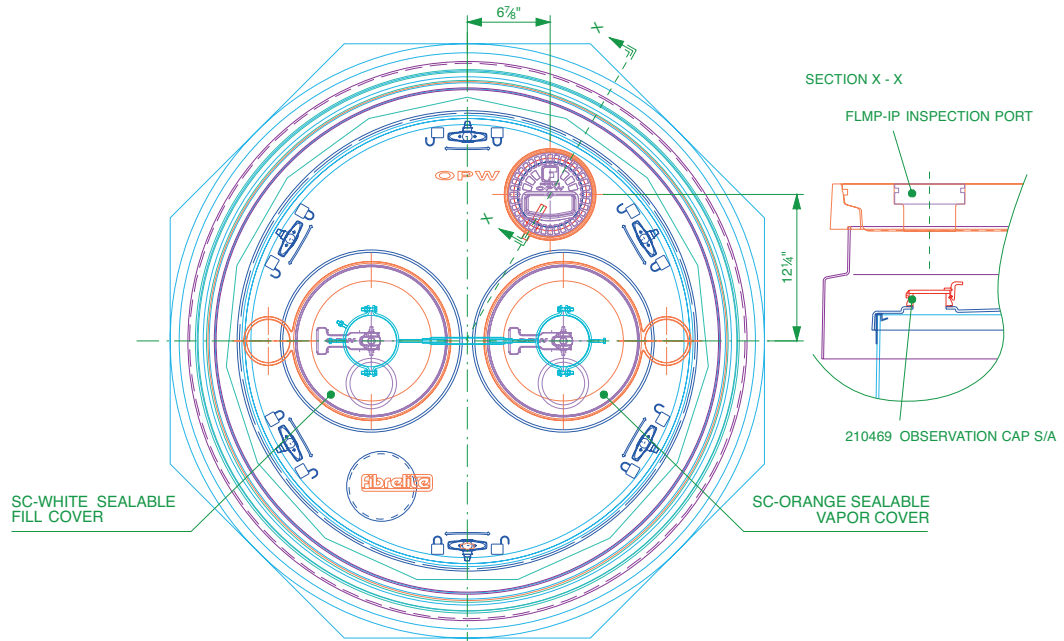

FibreTite multiport kit includes watertight platform for (2) 5-gallon spill buckets, 40" diameter multiport cover, port covers, frame and skirt.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

FIBRELITE 

PART OF OPW A DOVER COMPANY

TYPICAL INSTALLATION

VERY IMPORTANT


To allow for drainage, Fibrelite recommends that the concrete be sloped away from the top outer edge of the frame (A) a minimum of 1/2" over a 12" distance. Do not expose the top outer edge of the frame (A) – the concrete pad must be flush with the top outer edge of the frame.

CONCRETE

VERY IMPORTANT

FRAMES MUST BE INSTALLED FLUSH WITH FINISHED GRADE OR SET SLIGHTLY BELOW FINISHED GRADE TO PROTECT FROM SNOWPLOW DAMAGE

VERY IMPORTANT
The underside of the frame must be adequately supported by concrete.

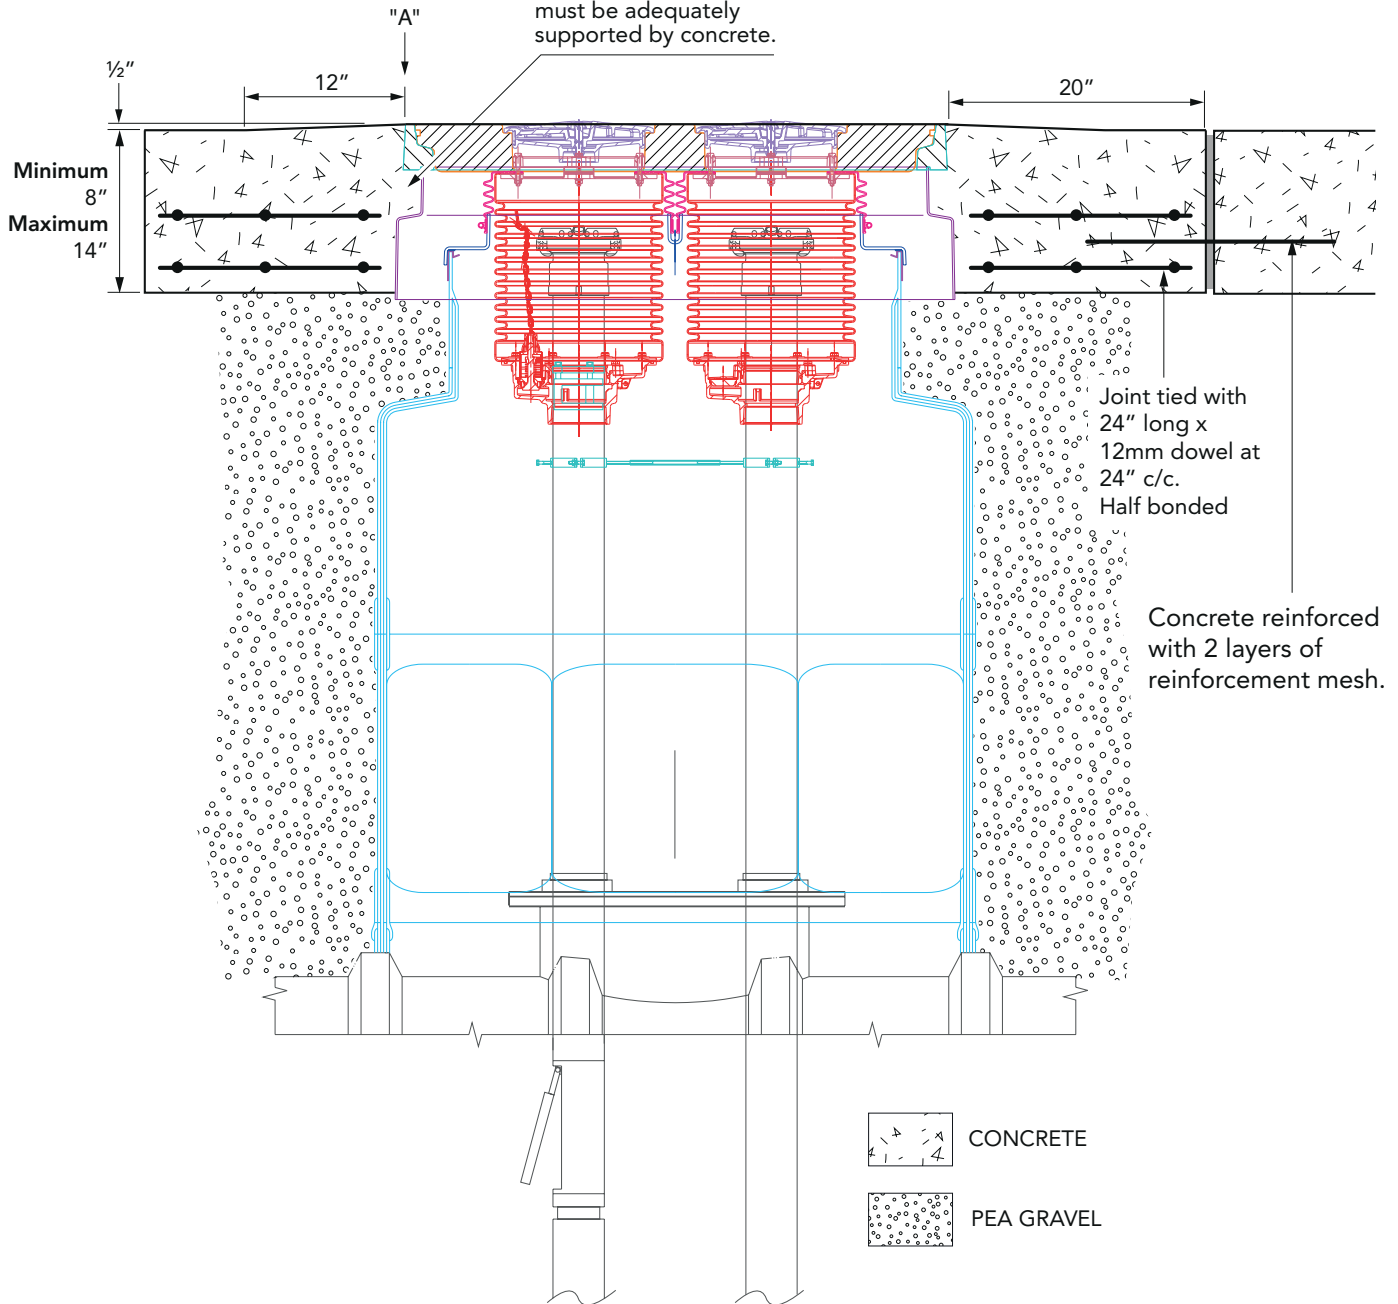

FibreTite multiport kit includes watertight platform for (2) 5-gallon spill buckets, 40" diameter multiport cover, port covers, frame and skirt.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

FIBRELITE

PART OF OPW A DOWER COMPANY