


FibreTite multiport kit includes watertight platform for (1) 5-gallon spill bucket, 40" diameter offset cover, port cover, frame and skirt.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

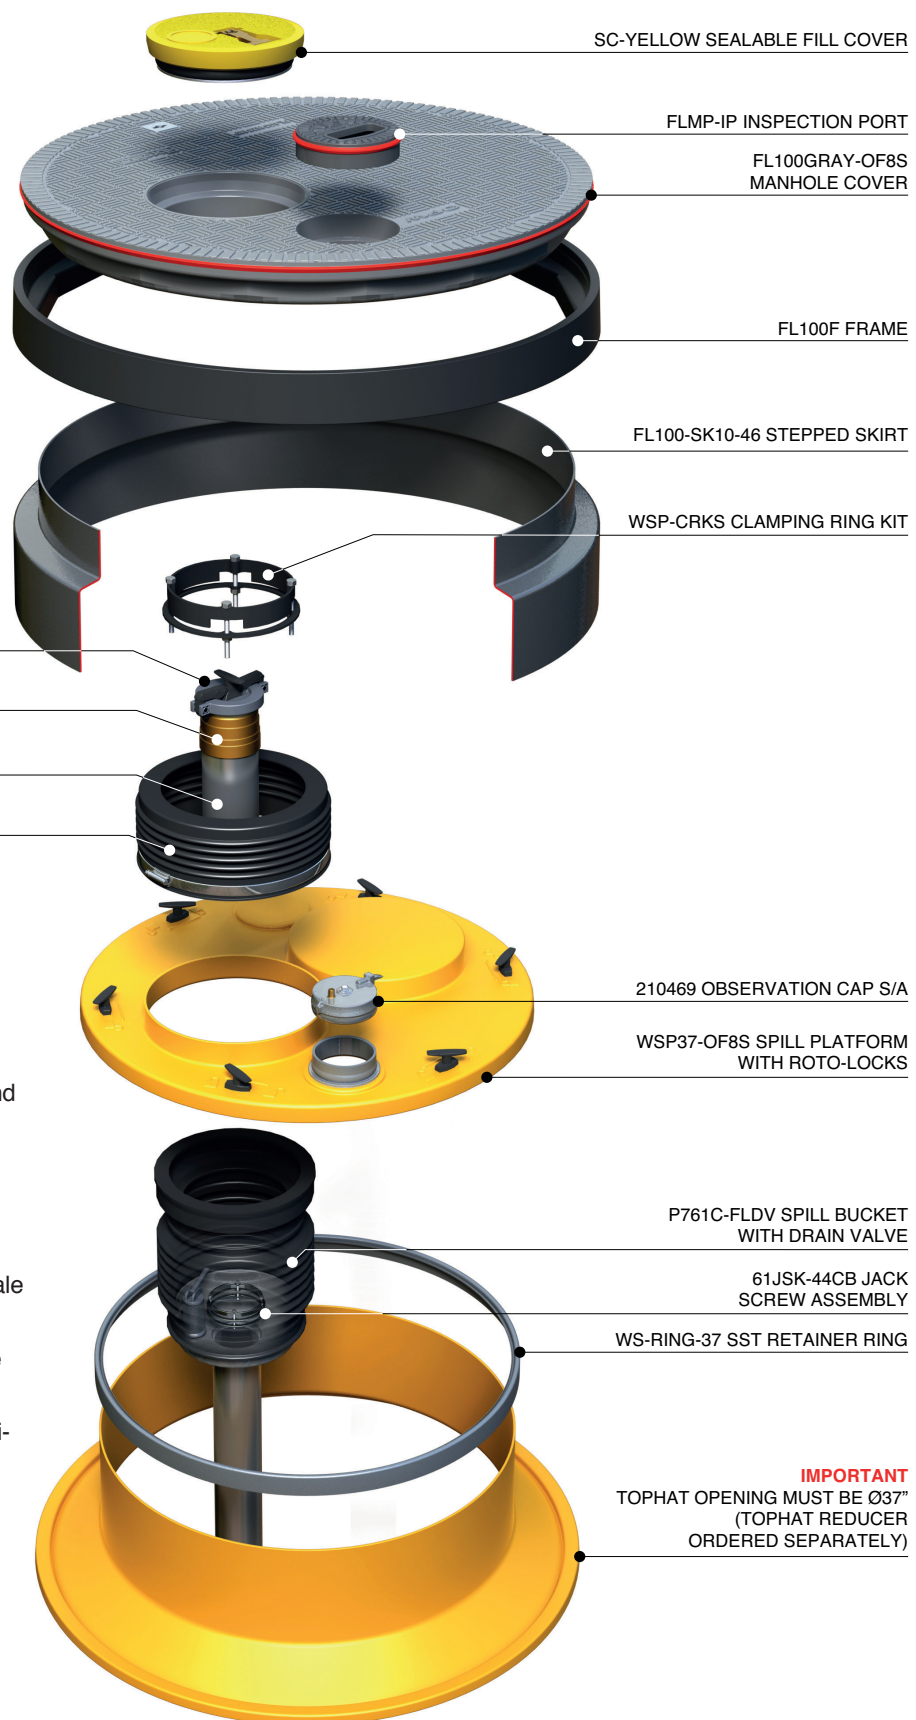

**Features**



- CARB Approved
- Unaffected by biofuels
- Will not corrode, crack or crumble
- Sealed manhole covers are water and vapor tight
- Easy and safe manual removal
- Lifting aid eliminates back injury and crushed fingers
- Eliminates risk of theft due to no resale value to the scrap market
- Incredibly strong monolithic structure that will not delaminate
- Treads incorporate a specialised anti-slip material
- Range of UV stable colors available that will not flake or crack
- Security locks available
- Cover marking / customisation available
- Anti-static

**IMPORTANT**  
TOPHAT OPENING MUST BE Ø37"  
(TOPHAT REDUCER ORDERED SEPARATELY)

FibreTite multiport kit includes watertight platform for (1) 5-gallon spill bucket, 40" diameter offset cover, port cover, frame and skirt.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.



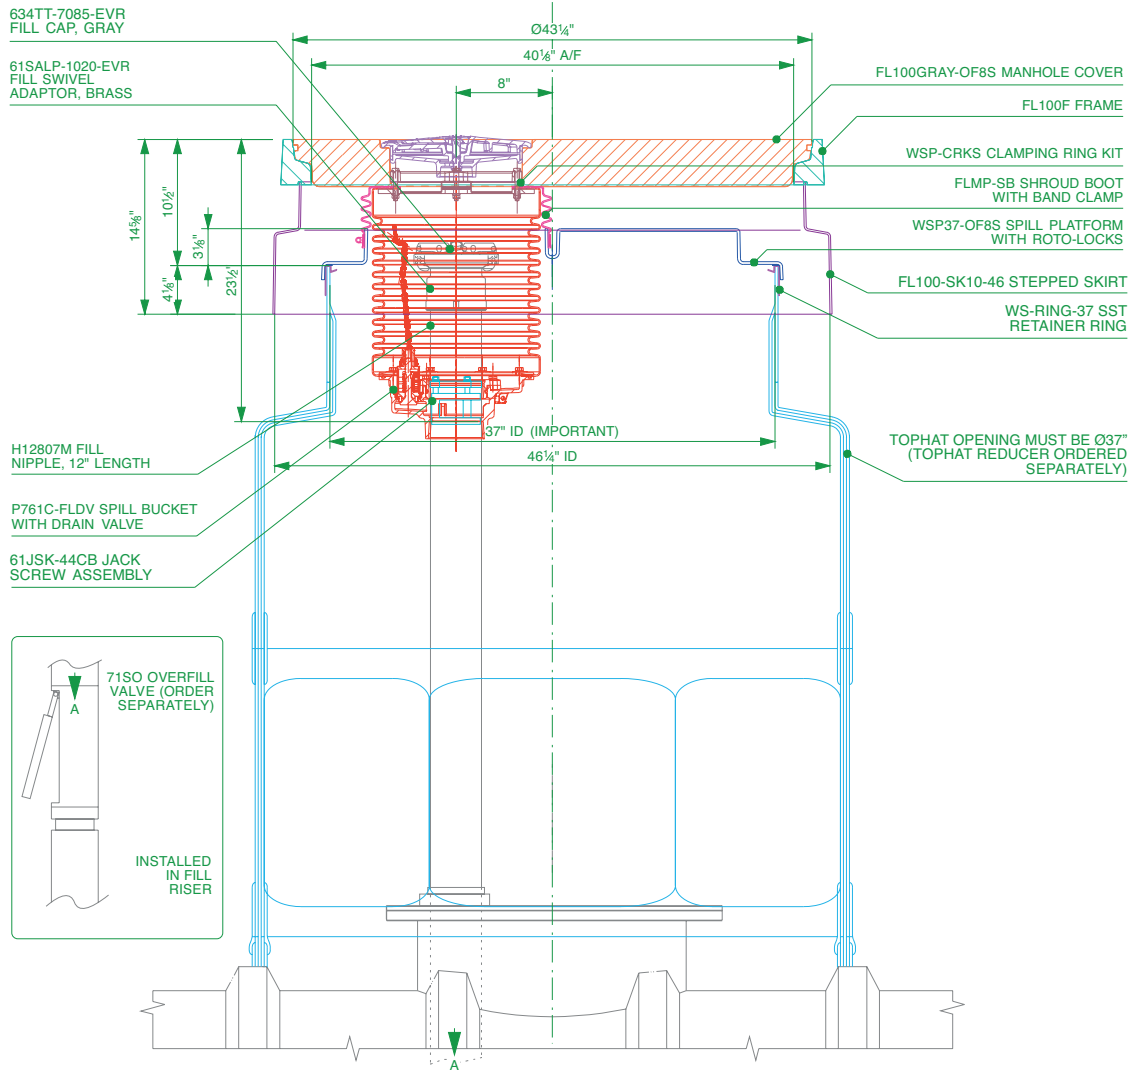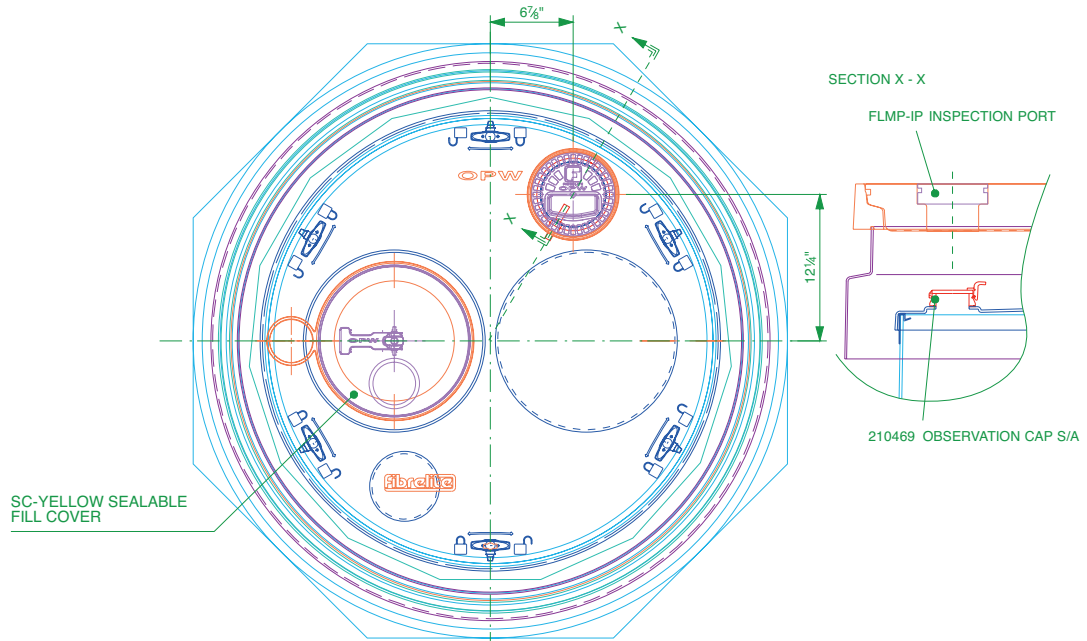

FibreTite multiport kit includes watertight platform for (1) 5-gallon spill bucket, 40" diameter offset cover, port cover, frame and skirt.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

**FIBRELITE**   
PART OF OPW A DOVER COMPANY

## TYPICAL INSTALLATION

**! VERY IMPORTANT !**


To allow for drainage, Fibrelite recommends that the concrete be sloped away from the top outer edge of the frame (A) a minimum of 1/2" over a 12" distance. Do not expose the top outer edge of the frame (A) – the concrete pad must be flush with the top outer edge of the frame.

### CONCRETE

**VERY IMPORTANT**

FRAMES MUST BE INSTALLED FLUSH WITH FINISHED GRADE OR SET SLIGHTLY BELOW FINISHED GRADE TO PROTECT FROM SNOWPLOW DAMAGE

**VERY IMPORTANT**  
The underside of the frame must be adequately supported by concrete.

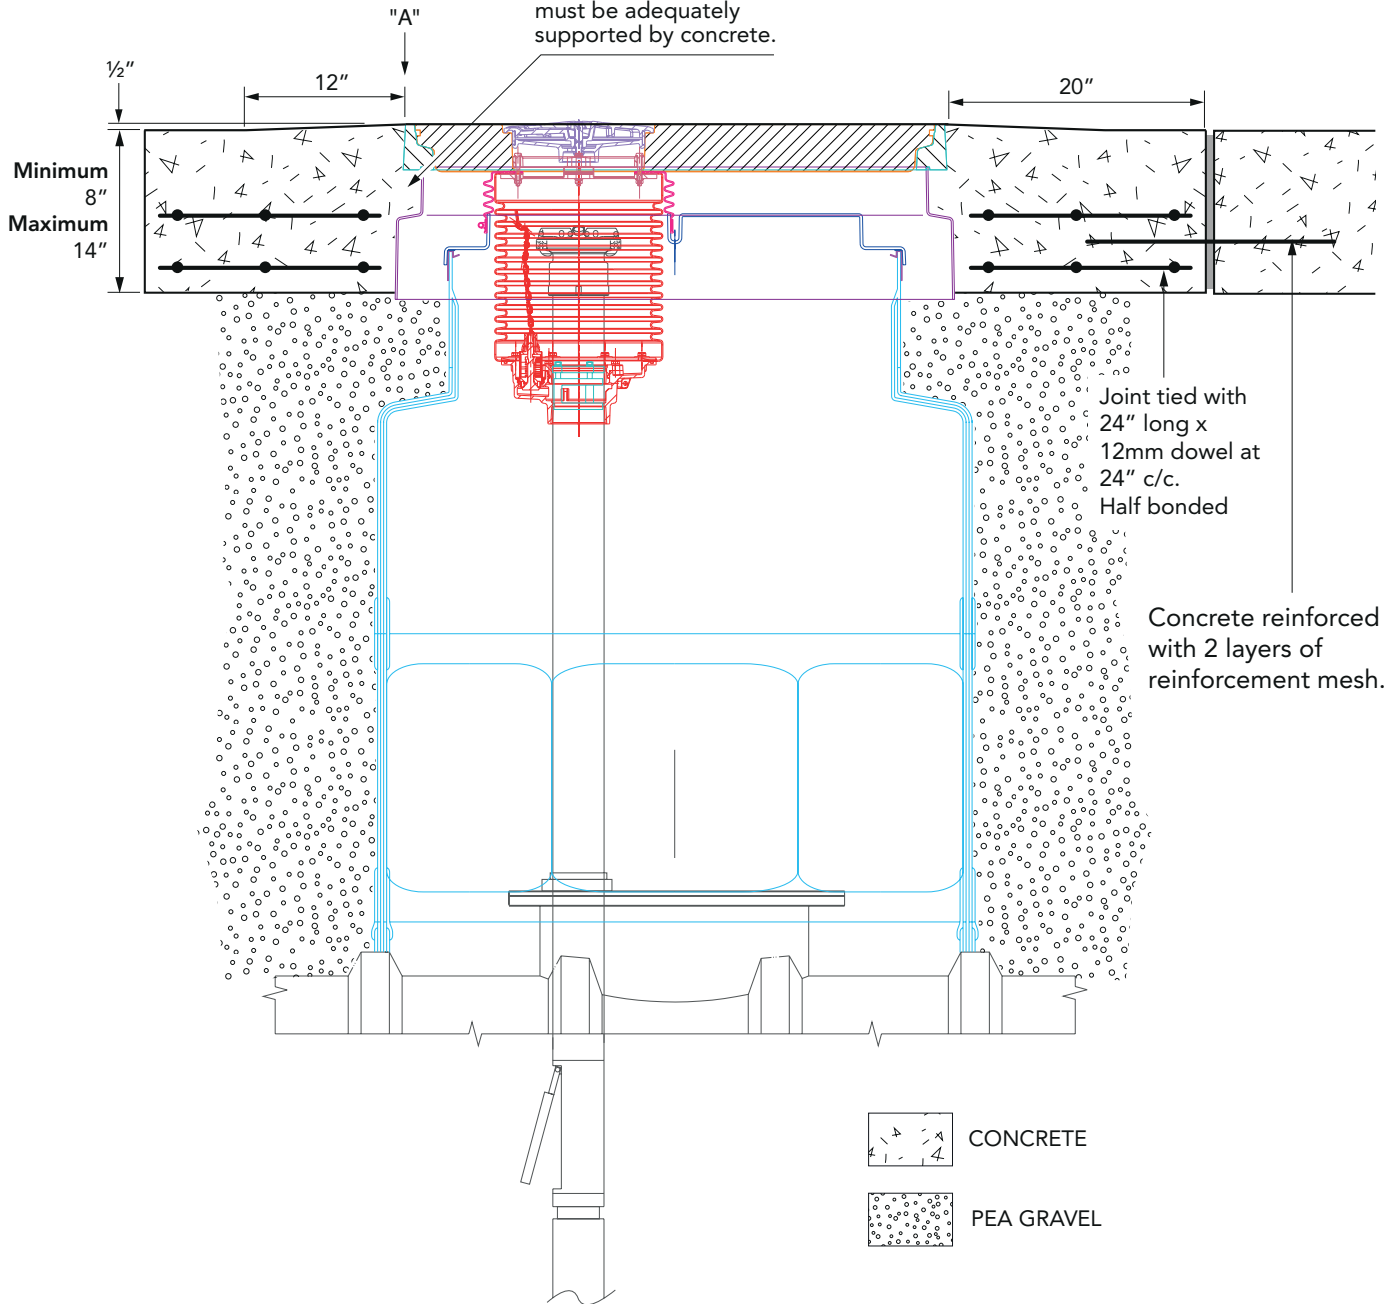

FibreTite multiport kit includes watertight platform for (1) 5-gallon spill bucket, 40" diameter offset cover, port cover, frame and skirt.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

**FIBRELITE** 

PART OF OPW A DOVER COMPANY